

# CLF

## DYNAMIC WHITE PAR COMPACT LED FIXTURE COLD & WARM WHITE LEDS



The CLF Dynamic White PAR is a compact LED fixture with an extraordinary high output which contains warm and cold white high power LEDs. The powerful LEDs provide extremely high output and ensures flicker-free operation when using cameras.

The Dynamic White PAR contains specially selected LEDs which provide cold and warm white with a CRI > 90. Warm and cold white control between 2,800K and 6,500K and color mixing can be adjusted in 3 different DMX modes or by using the on-board menu. The fixture contains both powerCON in and out and can be connected with three pins XLR. No fan is installed in the Dynamic White PAR so it is also suitable for silent applications.


The fixture can be placed on the floor or mounted to truss structures by using the unique CLF quicklock system. This hanging system is easy to use and time-saving. The solid housing of the fixture makes it suitable for every rental stock and fixed installation.

- 25° BEAM ANGLE
- EXTENSIVE WHITE COLOR TEMPERATURE CONTROL (2,800K – 6,500K, CRI>90)
- SOLID HOUSING
- DOUBLE BRACKET FOR FLOOR AND TRUSS MOUNTING
- FLICKER FREE OPERATION
- POWERCON IN AND OUT

Flux out: 1449 lm

3m	126.0,193.9fc 1357,2087lx	107.96cm
4m	70.90,109.1fc 763.2,1174lx	143.94cm
5m	45.38,69.81fc 488.4,751.4lx	179.93cm
6m	31.51,48.48fc 339.2,521.8lx	215.91cm
7m	23.15,35.62fc 249.2,383.4lx	251.90cm

Height      Eavg,Emax      Angle: 25°      Diameter

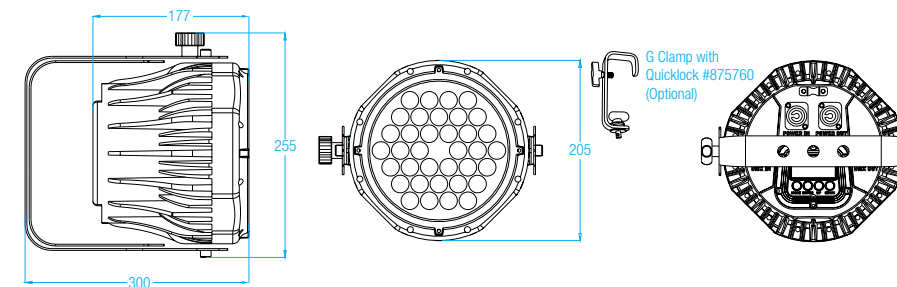

### FACTSHEET

DMX channels  
Beam angle  
Power supply  
Power consumption

Cooling  
DMX connection  
Dimensions  
Weight  
Certification  
Item number  
Included items  
IP rating  
Optional accessories

2, 3 or 7 channels  
25°  
100 - 240 VAC  
Max. 82 Watt  
(2 Watt in standby)  
Convection / no fan  
3p XLR in & out  
255 x 205 x 300 mm (lwxhx)  
4 Kg  
CE, RoHS  
156000  
Power cable, Filter Frame  
IP22  
Snoot, Barndoor, Flightcase